COUNTY OF SUMMIT
CLEVELAND MASSILLON ROAD (C.H. 17)
RESURFACING - PART 1

P.I.D. #108467
COPLEY TOWNSHIP

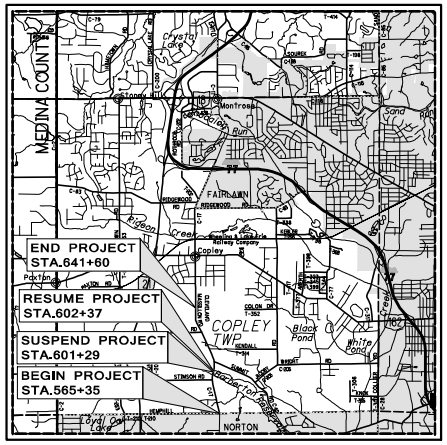

LOCATION MAP

LATITUDE: 41°4'12" LONGITUDE: 81°38'22"

SCALE IN MILES

0 1 2 3 4

N

PORTION TO BE IMPROVED _____
INTERSTATE HIGHWAY _____
FEDERAL ROUTES _____
STATE ROUTES _____
COUNTY & TOWNSHIP ROADS _____
OTHER ROADS _____

DESIGN DESIGNATION

DESIGN SPEED ..... 50 MPH
LEGAL SPEED ..... 45 MPH
DESIGN FUNCTIONAL CLASSIFICATION:
MINOR ARTERIAL (URBAN)

DESIGN EXCEPTIONS

NONE

TICKET NOS.: A009401706 A009401711 A009401718 A009401722 A009401730

UNDERGROUND UTILITIES
Contact Two Working Days Before You Dig
OHIO811.org Before You Dig
OHIO811, 8-1-1, or 1-800-362-2764
(Non-members must be called directly)

PLAN PREPARED BY:
EUTHENICS INC.
CONSULTING ENGINEERS
8235 Mohawk Drive, Strongsville, Ohio
(440) 260-1555

PROJECT DESCRIPTION

THE WORK WITHIN THE LIMITS OF THIS 1.44 MILE RESURFACING AND SHOULDER WIDENING IMPROVEMENT PROJECT INCLUDES THE PLANING OF THE EXISTING ASPHALT CONCRETE WEARING COURSE, THE REPAIR OF DETERIORATED FLEXIBLE AND/OR RIGID BASE, PAVED SHOULDER WIDENING (INCLUDING THROUGH THE ROCK-CUT SECTION), THE CONSTRUCTION OF A UNIFORM 2.25 INCH ASPHALT CONCRETE OVERLAY, AND THE INSTALLATION OF OTHER RELATED ITEMS AS SHOWN ON THE PLANS OR STIPULATED IN THE SPECIFICATIONS, PLAN NOTES, PROPOSAL NOTES, OR ELSEWHERE IN THE BID PACKAGE FOR CLEVELAND MASSILLON ROAD (C.H. 17) RESURFACING - PART 1, IN COPLEY TOWNSHIP.

PROJECT EARTH DISTURBED AREA:	1.72 ACRES
ESTIMATED CONTRACTOR EARTH DISTURBED AREA:	N/A ACRES
NOTICE OF INTENT EARTH DISTURBED AREA:	1.72 ACRES

2019 SPECIFICATIONS

THE STANDARD SPECIFICATIONS OF THE STATE OF OHIO, DEPARTMENT OF TRANSPORTATION, INCLUDING CHANGES AND SUPPLEMENTAL SPECIFICATIONS LISTED IN THE PROPOSAL SHALL GOVERN THIS IMPROVEMENT.

INDEX OF SHEETS:

TITLE SHEET	1
SCHEMATIC PLAN	2-3
TYPICAL SECTIONS	4-5
GENERAL NOTES	6-9
MAINTENANCE OF TRAFFIC NOTES	10-12
DETOUR PLAN	13
GENERAL SUMMARY	14-15
PAVEMENT CALCULATIONS	16
DRIVEWAY DETAILS	17
PROJECT SITE PLAN	18
PLANS	19-25
CROSS SECTIONS	26-35
MISCELLANEOUS DETAILS	36

STAGE 3

ENGINEERS SEAL:

SIGNED: _____
DATE: _____

OHIO DEPARTMENT OF TRANSPORTATION STANDARD CONSTRUCTION DRAWINGS					SUPPLEMENTAL SPECIFICATIONS	SPECIAL PROVISIONS
BP-2.5 7/19/13	MGS-1.1 1/19/18	TC-41.20 10/18/13	MT-95.31 7/19/19		800 1/15/21	
BP-3.1 1/17/20	MGS-4.2 7/19/13	TC-42.20 10/18/13	MT-95.32 4/19/19		832 10/19/18	
BP-3.2 1/18/19	MGS-4.3 1/18/13		MT-95.50 7/21/17			
BP-4.1 7/19/13		TC-65.10 1/17/14	MT-97.10 4/19/19			
BP-5.1 1/18/19	RM-1.1 1/15/21	TC-65.11 7/21/17	MT-97.11 1/20/17			
			MT-99.20 4/19/19			
DM-1.1 7/17/20			MT-101.60 1/17/20			
DM-1.2 1/18/13			MT-101.90 7/17/20			
DM-4.2 7/20/12			MT-105.10 1/17/20			
DM-4.3 1/15/16						
DM-4.4 1/15/16						

APPROVED _____
DATE _____ SUMMIT COUNTY ENGINEER

APPROVED _____
DATE _____

FEDERAL PROJECT NO. E191 (199)
PID NO. 108467
CONSTRUCTION PROJECT NO. N/A
RAILROAD INVOLVEMENT NONE
SUM - C.H. 17
1 / 36

F:\Jobs\1127-Clev Mass Rd Resurfacing\Design\Roadway\Sheets\1127_GT001.dwg 31-Mar-21 5:07 PM